

中國-南京
NANJING CHINA



让光更有价值

南京箭特科技

NANJING GIANT TECHNOLOGY

光纤灯
FIBER OPTIC LIGHT

光纤材料
FIBER OPTIC MATERIALS

光纤配件
FIBER OPTIC ACCESSORIES

LED光源器
LED LIGHT ENGINE

图案投影灯
GOBO PROJECTOR

特效灯
SPECIAL EFFECT LIGHT







关于箭特 About NJGIANT

Nanjing Giant Technology Co., Ltd is a private high-tech corporation. Its main products include optic fibers, fiber optic lights, logo lights, etc. Besides, it also focuses on design, development, production and marketing services of its green lighting products. This company, set up in 2000, is located in Nanjing which is a world-famous ancient capital of six dynasties. Its standard clean manufacturing workshop and several automatic production lines occupy nearly ten thousand square meters.

南京箭特科技有限公司系民营高科技企业，主要从事LED照明产品、LED显示产品；各种塑料光纤、光纤灯光纤照明产品、光纤灯饰等绿色照明产品的设计、开发、生产与销售服务。公司成立于2000年，设在享誉海内外的六朝古都——南京，公司拥有近万平米的标准化洁净生产车间，数条全自动生产线，年生产各类LED产品数十万套，光纤产品数千万米。





箭特工程实例 Application

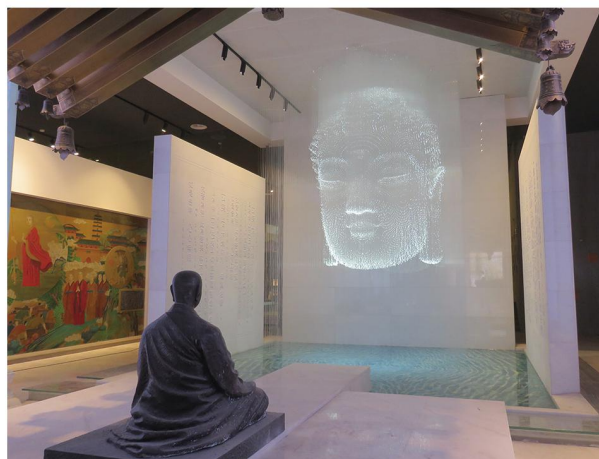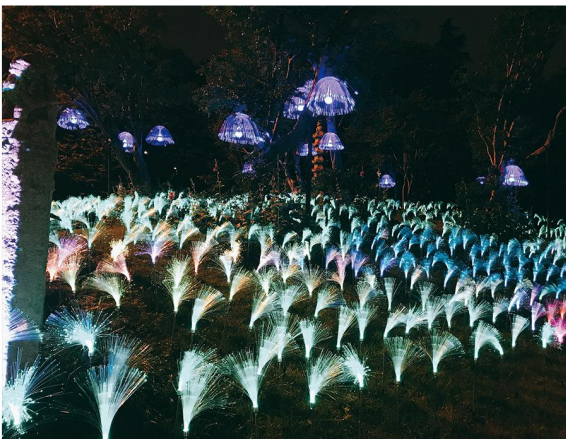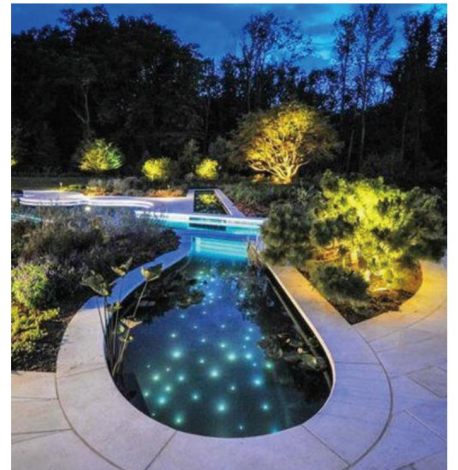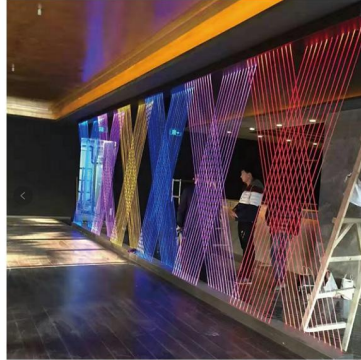




光纤星空集成吊顶

Fiber Optic Star Ceiling Tile



产品细节 Product Details

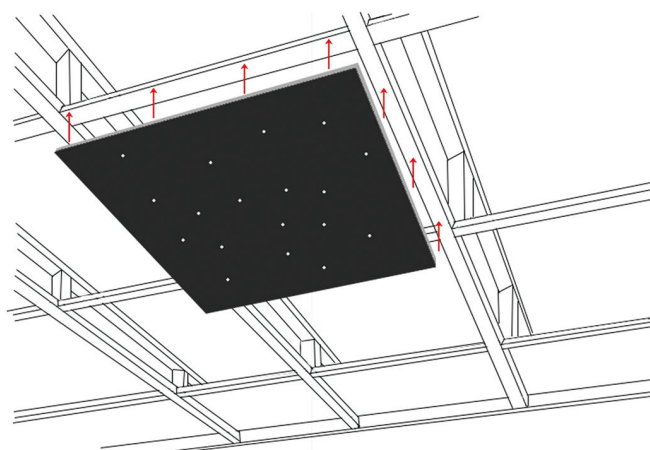

· 透过宇宙的空隙, 满天繁星

Traveling through the infinite universe, with countless stars all over the sky.

· 我们为你创造星辰大海

We'd like to create starry sea belong to you.

· 简单生活, 卸下尘世的喧嚣, 在星空中回归自我

Escape far away from the hurly-burly city to enjoy the freedom under the stars.

· 使用枪钉或胶水把星空板固定在木龙骨上。

Fix the panel onto the wooden frame by gun nail or glue.

· 面板采用60cm*60cm环保精品吸音棉




The panel uses 60cm*60cm environment-friendly high-quality sound-absorption board.

· 颠覆传统安装方式, 直接拼装, 安装简便

Overturn the traditional installation methods. Easy to install.


星空板参数 Tile Parameter

MODEL 型号	LED POWER LED 功率	LED COLOR LED 颜色	PANEL SIZE 尺寸(mm)	PANEL COLOR 板材颜色	FIBER MATERIAL 光纤材质	PANEL MATERIAL 板材材质
GFCP	0.4W	RGB	600*600*9	Black / White etc.黑白等	PMMA	Polyester 聚酯纤维

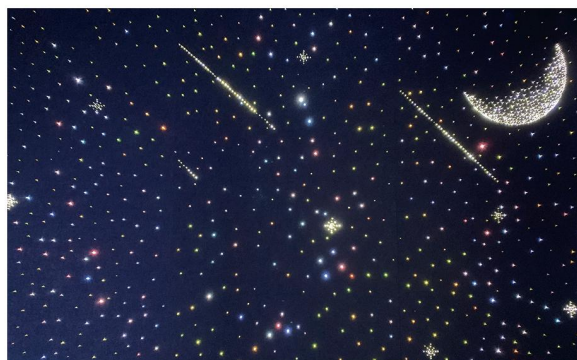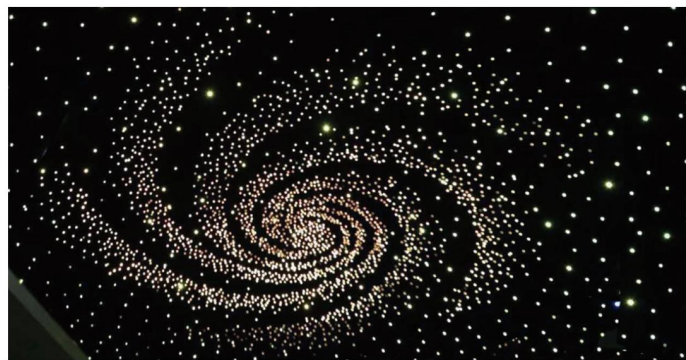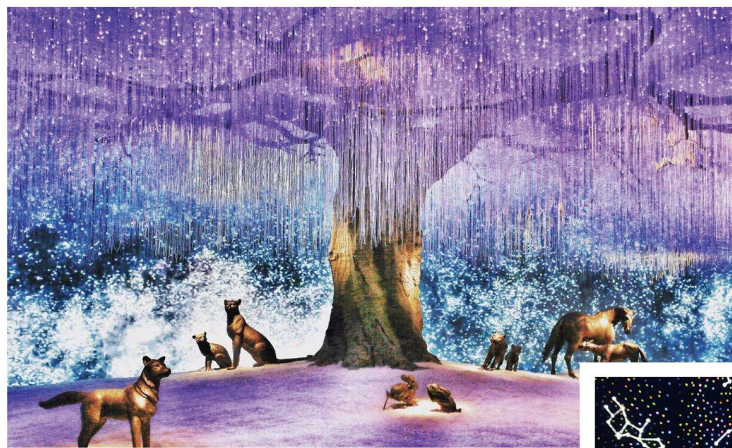

FIBER OPTIC KITS

光纤小包装

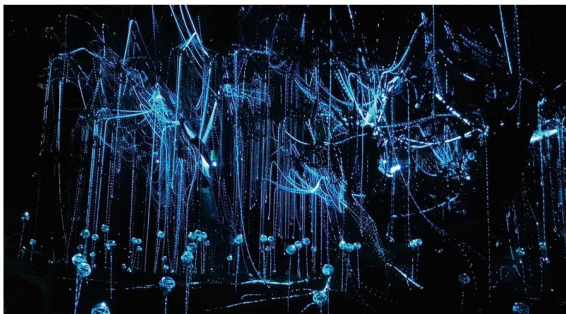

STARRY SKY

KITS COMPONENTS




GFK-5 Fiber Optic Kit

Voltage 电压: AC 100-240V

Power 功率: 5W

Color 颜色: RGB

Fiber Optic 光纤: 0.75mm 180pcs
/ 1.0mm 100pcs

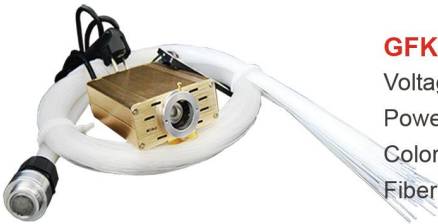

GFK-16 Fiber Optic Kit

Voltage 电压: AC 100-240V

Power 功率: 16W

Color 颜色: RGB

Fiber Optic 光纤: 0.75mm 400pcs
/ 1.0mm 220pcs



GFK-27 Fiber Optic Kit

Voltage 电压: AC 100-240V

Power 功率: 27W

Color 颜色: RGB

Fiber Optic 光纤: 0.75mm 900pcs
/ 1.0mm 540pcs



GFP-1 Star Light Panel

Material 材质: Polyester 聚酯纤维

Voltage 电压: DC 5V

Power 功率: 1W

Color 颜色: RGB / White

Size 尺寸: 600X600X9mm

- 光源器: LED系列光源器
- 光线尾灯: 选配
- 光线束: 可由一种或几种长度, 直径的光纤组合在一起

- Light Engine: LED Series Light Engine
- End Fitting: Optional
- Fiber Optic Bundle: Composed by same or different length and size of fiber optic

SPECIAL EFFECT PROJECTOR

特效氛围投影灯

柔情似水，佳期如梦，浪漫在漂浮的梦中，风韵犹存。在这里，现实与浪漫是一层薄薄的纱幔。轻轻撩动，便是感情的升华。

Tender love flows like a stream, happy date seems but a dream. Return to a simple life close to nature, a life with fewer distractions and ample time to enjoy scenery.

WATER RIPPLE
水纹灯



SKY EFFECT
天空灯



FIREFLY
萤火虫



投影灯参数 Projector Parameter

PROJECTION EFFECT 投影效果	WATER RIPPLE EFFECT 水纹灯	SKY EFFECT 天空灯	FIREFLY EFFECT 萤火虫灯
POWER 功率 (W)	40 / 60 / 100 / 150 / 240 / 350 / 450	40 / 60 / 100 / 150 / 240 / 350 / 450	10W
ILLUMINANT 光源	欧思朗LEO芯片 Osram	欧思朗LEO芯片 Osram	大功率激光二极管 Laser Piode
IP LEVEL 防护等级	IP65	IP65	IP67, CLASS 2, A FD A
OPTIMUM DISTANCE 最佳投射距离 (m)	5 ~ 12m	3 ~ 6m	3 ~ 8m
OPTIMUM AREA 最佳投射面积 (m²)	5 ~ 30m²	12 ~ 60m²	12 ~ 60m²

广告投影灯 LOGO Projector

CE RoHS CB

GLG系列广告投影灯

GLG Series LOGO Projector

LED图案投影灯，适用于酒吧、KTV、SPA、商场、博物馆等多种商业场所投影广告、路标、品牌图案、装饰图案、警告语等。

The LED logo projectors are widely used for showing brand LOGO, direction guide, advertising, decoration images and warning in bar, shopping mall, museum, etc.

产品细节 Product Details



- 三步轻松购买：图案设计、生产制作、包裹快运
3 Steps easy to buy : Logo Customization ,
Manufacture , shipping
- 三种安装方式：常规、轨道、筒灯
3 Installation methods : Surface Mounted, Track
and Embedded

色片定制 Pattern Customization



Single Color




Multiple Color



Full Color

投影灯距离参数 Projection Distance

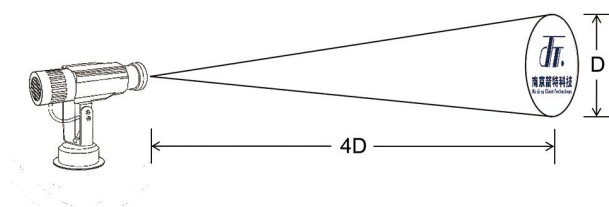


· 投影灯成像距离比约为 1: 4，可联系客服修改

Imaging size to distance is 1: 4

Please contact us for customization

中国的北方 左邻右里
房前房后 一砖一瓦
都透露着北方人，
浓厚的生活气息

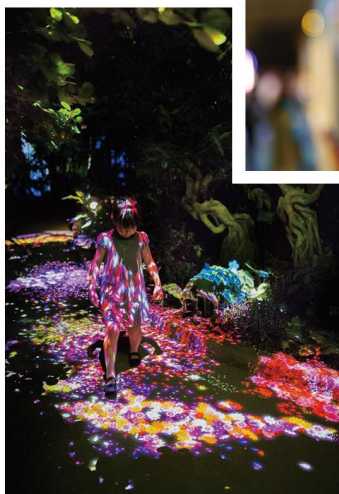

投影灯参数 Logo Light Parameter ● 标配 Standard ○ 选配 Optional









APPEARANCE 外形					
POWER 功率 (W)		5W	12W	16W / 20W / 30W	40 / 60 / 100 / 150 / 240 / 350 / 450W
IP65 WATERPROOF 防水					●
PERFORMANCE 投影效果	Static 静态	●	●	●	●
	Rotating 转动			○	○
	Flashing 闪烁			○	
	Multi Gobos 多图切换				○
CONTROL MODE 控制方式	Remote Control 遥控器			○	○
	DMX 512				○
MOUNTING MODE 安装方式	Surface 吸顶式		●	●	●
	E27 Interface 接口	●			
	Embedded 嵌入式	○	○	○	
	Track 轨道	○	○	○	




Fiber Optic Chandelier 光纤吊灯

3D吊灯订制 3D Customization

光纤吊灯是一种新型的创意性灯具，其独特的造型及光效是其它灯具无法替代的。广泛应用于酒店、餐厅、夜总会、商场、景区等消费场所，并逐渐走向家庭。各种造型也可根据客户需求订做。

Fiber optic chandelier is a new creative lighting. It is unreplaceable because of its special design and lighting effect. It is widely used at hotel, restaurant, night club and bar, shopping mall, scenic spot, etc. Customer's designs are welcome as well.



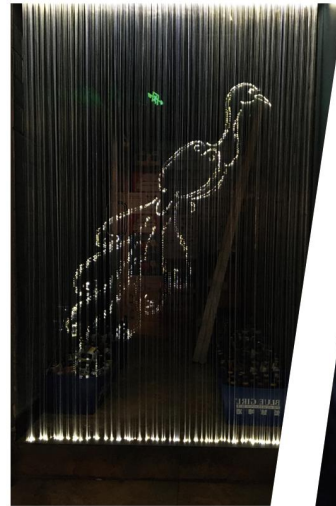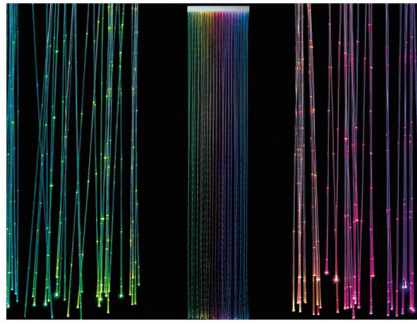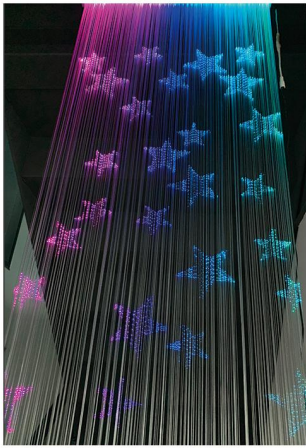

泡沫内衬包装，减少运输中冲击
Inner foam package, avoid impact in the shipment.

可接插式铝合金支架
Connectable aluminum panel

无线遥控，亮度、模式任意调节
Wireless RC, adjust brightness and running model freely.

光纤任意折弯剪裁，不会变形
Flexible and cuttable fiber optic.

外置5V直流电源
External 5V DC adaptor.

光纤帘及装饰灯 Fiber Optic Curtain

箭特光纤致力于光纤帘及光纤氛围灯的设计及制作，各种风格图案可根据客户要求定制。

NJGIANT is good at designing and customizing fiber optic lights for atmosphere creation. it can also make according to clients' requirements.

光荣与梦想 ——中国共产党杭州历史展示

这里展示的是杭州在中国共产党领导下的革命、建设和改革开放的光辉历程。中国共产党在杭州的历史，是中国共产党领导中国人民进行革命、建设和改革开放的光辉历程。中国共产党在杭州的历史，是中国共产党领导中国人民进行革命、建设和改革开放的光辉历程。

Plastic Fiber Optic

塑料光纤

Application 应用领域






- 照明和信号传输 Illumination and Signal Transmission
- 光纤传感 Fiber Optic Sensor
- 室内外装饰照明 Indoor and Outdoor Decorative Illumination

F I B E R O P T I C A P P L I C A T I O N

Plastic Fiber Optic Parameter 塑料光纤参数

CORE MATERIAL 材质	REFRACTIVE INDEX 折射率	ATTENUATION 光衰(dB/km)	NUMERICAL APERTURE 数值孔径	MAX RECEIVE ANGLE 最大接收角
PMMA	1.49	≤350 (650nm)	0.5	60°
BEND RADIUS 弯曲半径(mm)	OPERATION TEMPERATURE 工作温度(℃)	FIBER DIAMETER 光纤直径(mm)		
≥10°Fiber Diameter	-20℃ ~ 70℃	0.25 / 0.5 / 0.75 / 1.0 / 1.5 / 2.0 / 2.5 / 3.0 / 6.0 / 11.0 / 14.0		

Product Model 产品型号

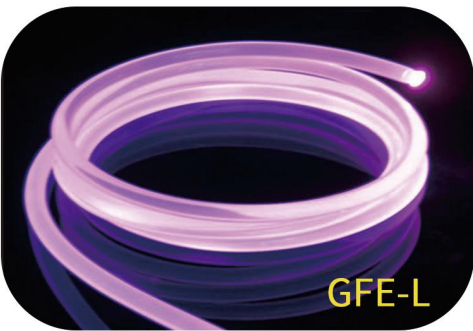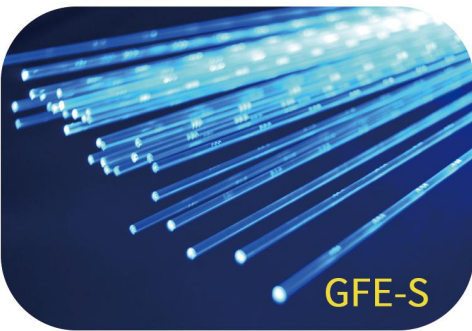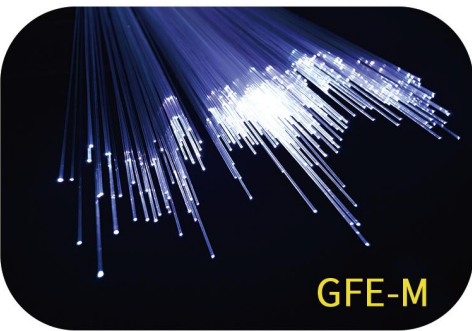

PRODUCT 产品	FIBER DIAMETER 光纤直径(mm)
End Glow Fiber Optic 端点光纤	0.25 / 0.5 / 0.75 / 1.0 / 1.5 / 2.0 / 2.5 / 3.0
Side Spot Fiber Optic 侧点光纤	0.5 / 0.75 / 1.0 / 1.5 / 2.0 / 2.5 / 3.0
Side Glow Fiber Optic 通体光纤	1.5 / 2.0 / 3.0 / 4.0 / 5.0 / 6.0 / 8.0 / 10.0 / 11.0 / 12.0 / 14.0

Plastic Fiber Optic Cable

塑料光缆



Single-String Fiber Optic Cable 单股光缆

尺寸支持定制
Custom Size Available



MODEL NO. 型号	FIBER DIAMETER 光纤直径(mm)	OUTER DIAMETER 外径(mm)	ROLL LENGTH 长度(m/Roll)	JACKET 外表材质
GFEL-0.75M	0.75	1.6	2700	Black PE / PVC 黑色 PE / PVC
GFEL-1.00M	1.0	2.2	1500	
GFEL-1.50M	1.5	2.5	700	
GFEL-2.00M	2.0	3.0	350	
GFEL-2.50M	2.5	3.5	200	
GFEL-3.00M	3.0	4.0	150	

S I N G L E - S T R I N G C A B L E

Multi-String Fiber Optic Cable 多股光缆

MODEL NO. 型号	FIBER DIAMETER 光纤直径(mm)	OUTER DIAMETER 外径(mm)	ROLL LENGTH 长度(m/Roll)	JACKETING 外表材质
GFEL-7*0.75M	0.75	4.0	900	Black PVC 黑色 PVC
GFEL-14*0.75M	0.75	5.0	450	
GFEL-3*0.75S	0.75	3.0	500	Transparent PVC 透明 PVC
GFEL-5*0.75S	0.75	3.0	500	



M U L T I - S T R I N G C A B L E

GEM Series End Piece 光缆尾件



G E M S E R I E S E N D P I E C E


Light Engine 光源器



1. High bright fiber optic light engine 高亮光纤光源器
2. AC100-240V input 输入电压 AC100-240V
3. CE&RoHS 认证
4. Remote or manual control for all functions 全功能遥控、手控可选
5. Static, fast/slow speed, jump/twinkle/gradient/flow function 指定颜色,快/慢速,跳变/渐变流水等
6. RGB, 8 color, 6 color changing mode RGB, 8色、6种变色模式

L I G H T E N G I N E

CE RoHS

					
MODEL NO. 型号	GLE-1MINI	GLE-S	GLE-5	GLE-16	GLE-18
BULB TYPE 灯珠类型	LED	LED	LED	LED	LED
POWER 功率	1W	3W	5W	16W	18W
HOLE DIAMETER 孔径	1.5 - 8mm	5mm * 12	14mm	20mm	20mm
COLOR 颜色	Single Color单色	RGB	RGB	RGB / RGBW	RGB / RGBW
SIZE 尺寸(mm)	40 * 18 * 14	155 * 145 * 50	155 * 145 * 50	160 * 155 * 55	160 * 155 * 55
					
MODEL NO. 型号	GLE-27 Twinkle	GLE-45S	GLE-150	GLE-45 / 75 / 100 / 120	Waterproof Case
BULB TYPE 灯珠类型	LED	LED	Halogen 金卤灯	LED	/
POWER 功率	27W	45W	150W	45W / 75W / 100W / 120W	/
HOLE DIAMETER 孔径	30mm	30mm	30mm	30mm	/
COLOR 颜色	RGB / RGBW	RGB / RGBW	RGB	RGB / RGBW	/
SIZE 尺寸(mm)	210 * 240 * 145	310 * 170 * 90	410 * 315 * 230	320 * 265 * 145	435 * 360 * 260

Glass Fiber Optic 玻璃光纤

Glass Fiber Optic Light Guide 玻璃光纤传光束



玻璃光纤传光束由多组份玻璃光纤和PVC或不锈钢护套构成。可用于传感, 信号处理, 工业测量和过程控制, 照明系统医疗器械等多种领域。

Glass Fiber Light Guide is composed by glass fiber optic core and PVC/stainless jacket. It can be used for sensor, signal processing, industrial survey, lighting, medical equipment, etc.

Guide Light Bundle 传光束		Line Guide Light 线排灯	
TECHNICAL PARAMETER 技术参数	SINGLE DIAMETER 单丝直径	NUMERICAL APERTURE 数值孔径	HEAT RESISTANCE 耐热性
DATA	15μm~55μm	0.56 / 0.60 / 0.64 / 0.83	≥500℃
TRANSMISSIVITY/M 透过率/M	FIBER STRENGTH 光纤强度	SPECTRUM RANGE 光谱范围	
≥56%	>150kg/mm ²	380nm-1300nm	

Glass Fiber Optic Rod 玻璃光纤导光棒



玻璃光纤导光棒是一种纤维光学原件, 由一束规则排列的多组份玻璃光纤熔融而成, 具有传光和传输低分辨率图像的功能。

Glass Fiber Optic Light Conducting Rod is a solid fiber optic element made by a bundle of multi-component glass optical fibers fused together in parallel. This construction enables the rod not only to transmit light but also low resolution images.

- 牙科固化机用导光元件 Light conducting element for dental light curing unit
- 半导体激光治疗用导光元件 Light conducting element for medical treatment by semi-conducting laser
- 低分辨率传像元件 Image transmitting element with low resolution
- 提高照明强度用锥形导光元件 Fiber taper to raise luminous intensity

NUMERICAL APERTURE 数值孔径	OUTER DIAMETER 外径规格(mm)	DIAMETER TOLERANCE 外径公差(mm)	LENGTH AVAILABLE 长度规格(mm)
NA > 0.6	2.5~15	±0.2	5~1000
RESOLUTION 分辨率(lp/mm)	LIGHT TRANSMITTANCE 光透过率(Length 85mm)	TEMPERATURE RESISTANCE 耐热性	ANGLE OF CURVE 弯曲角度
2~8	≥80%	≥400℃	90°~180°


产品
PRODUCT

设计
DESIGN

定制
CUSTOMIZATION

安装
INSTALLATION

NIGHT PASSES LIGHT REMAIN

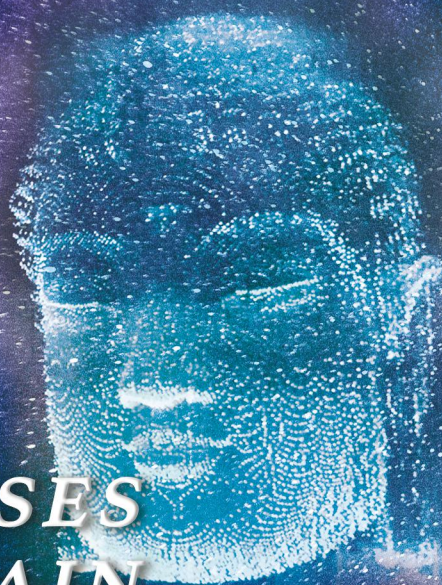

联系方式-TEL/WHATSAPP

+ 86 13951942583

微信-WECHAT

13951942583

电子邮箱-SKYPE/EMAIL

NJGIANT001@163.COM

网站-WEB

WWW.NJGIANT.COM

江苏省 南京市 建邺区 嘉陵江东街50号 康缘智汇港D幢1211 南京箭特科技有限公司
Room 1211, Building D, Kangyuan Zhihuigang, No.50 Jialingjiang East Road,
Jianye, Nanjing, Jiangsu, China

RICK SONG
宋瑞

